

















MAGNALUX
LUXURY LIGHTING



Exterior Lighting Catalogue









BISSO/ANNA

Anna

E27 Hexagonal Lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional TUV approved, long life and efficient LED filament lamps suitable for outdoor use. Insulation class II, protection rating IP55.


Dimensions
Height: 310 mm
Width: 220 mm
Depth: 192 mm
Weight: 1KG

Lampholder:
E27

Moulded Colours:
Black / White*

Diffuser PMMA:
Clear

GIGI/BISSO/ANNA3L BLACK ONLY




BISSO/ANNA

LAMP NOT
INCLUDED



BISSO/ANNAWH

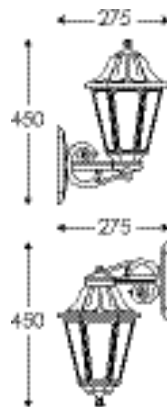


SICHEM/ANNA

LAMP NOT
INCLUDED



SICHEM/ANNA

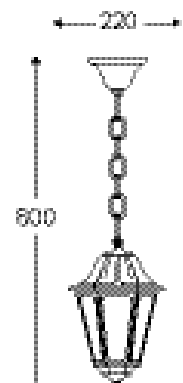


MIKROLOT/ANNA

LAMP NOT
INCLUDED




MIKROLOT/ANNA



MIZAR/ANNA

MIZAR/ANNA

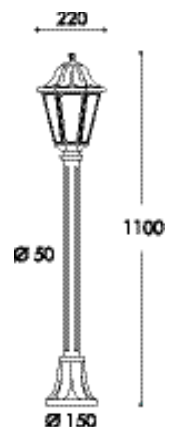

GIGI/BISSO/ANNA3L

GIGI/BISSO/ANNA3L




GIGI/BISSO/ANNA3L

IESSE

LAMP NOT INCLUDED



IESSEWH



DARIA



IESSE




DARIA

LAMP NOT INCLUDED



DARIA



Half lantern in classic style with E27 lampholder, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as optional with TÜV approved, long-life and efficient LED filament lamps suitable for outdoor use. Insulation class II, protection rating IP55.

Moulded Colours:
Black & White (IESSE)
Black (DARIA)

Diffuser PMMA:
Clear
Wall Plate:
White

Lampholder: E27




BISSO/SABA



Saba

E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV approved, long-life and efficient LED filament lamps suitable for outdoor use. Insulation class II, protection rating IP55.

Dimensions
Height: 320 mm
Width: 220 mm
Depth: 192 mm
Weight: 1KG



Lampholder:
E27

Moulded Colours:
Black

Diffuser PMMA:
Clear




BISSO/SABA

LAMP NOT
INCLUDED



BISSO/SABA

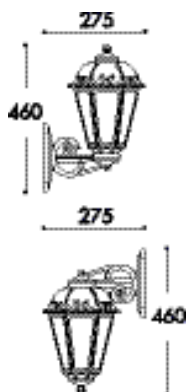


MIKROLOT/SABA

LAMP NOT
INCLUDED




MIKROLOT/SABA



MIZAR/SABA

MIZAR/SABA

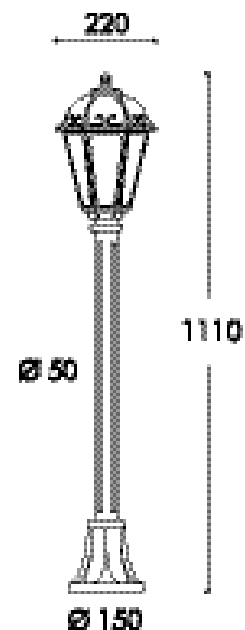

INCLUDED



Rut

E27 Hexagonal Lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional TUV approved, long life and efficient LED filament lamps suitable for outdoor use. Insulation class II, protection rating IP55.


Dimensions
Height: 410 mm
Width: 260 mm
Depth: 227 mm
Weight: 1.3KG

Lampholder:
E27

Moulded Colours:
Black**

Diffuser PMMA:
Clear

**BISSO/RUT & MINILOT/RUT AVAILABLE IN WHITE **




BISSO/RUT

LAMP NOT INCLUDED



BISSO/RUT

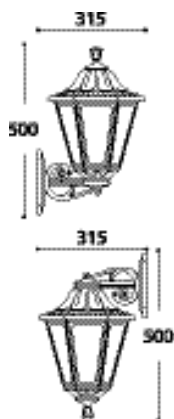

MINILOT/RUT

LAMP NOT INCLUDED



MINILOT/RUT



ARTU'/RUT




ARTU'/RUT



RICU BISSO RUT 3 LIGHT



RICU/BISSO/RUT3L





Cefa

E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV approved, long-life and efficient LED filament lamps suitable for outdoor use. Insulation class II, protection rating IP55.


Dimensions and Height

Height: 380 mm

Width: 230 mm

Depth: 230 mm

Weight: 1.3KG



Lampholder:
E27

Moulded Colour:
Black

Diffuser PMMA:
Clear




BISSO/CEFA

LAMP NOT
INCLUDED



BISSO/CEFA

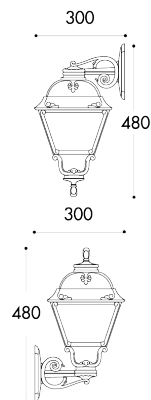


MINILOT/CEFA

LAMP NOT
INCLUDED



MINILOT/CEFA




SICHEM/CEFA

LAMP NOT
INCLUDED



SICHEM/CEFA

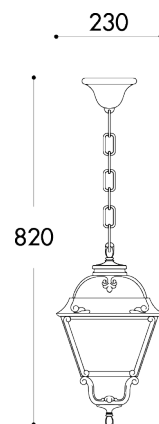


MIZAR/CEFA

MIZAR/CEFA



INCLUDED

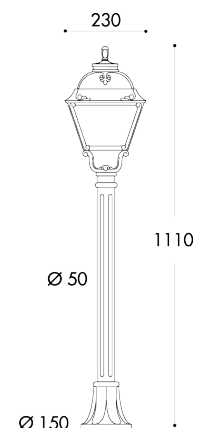

ARTU'/CEFA



RICU/BISSO/CEFA 3 LIGHT





Golia


E27 Square Lantern in classic style, made of shock-proof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional TUV approved, long life and efficient LED filament lamps suitable for outdoor use. Insulation class II, protection rating IP55.

Dimensions
Height: 360 mm
Width: 230 mm
Depth: 230 mm
Weight: 1.3KG

Lampholder:
E27

Moulded Colours:
Black

Diffuser PMMA:
Clear




BISSE/GOLIA

LAMP NOT INCLUDED



BISSE/GOLIA




MINILOT/GOLIA

LAMP NOT INCLUDED




MINILOT/GOLIA



MIZAR/GOLIA




MIZAR/GOLIA



ARTU'/GOLIA



ARTU'/GOLIA



RICU/BISSO/GOLIA3L



Globe Classic 250 & 300


Ø 250 mm & Ø 300 mm PMMA globe, complete with classic globe base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Supplied as optional with TÜV approved, long-life and efficient LED filament lamps suitable for outdoor use. Insulation class II, protection rating IP55.

Dimensions

Height: 260 mm

Width: 250 mm

Weight: 0.8KG




Dimensions

Height: 310 mm

Width: 300 mm

Weight: 1.1KG



Lampholder:

E27

Moulded Colours:

Black

Diffuser PMMA:

Opal, Clear



BISSO/G250

LAMP NOT INCLUDED



BISSO/G300

LAMP NOT INCLUDED



MIKROLOT/G250

LAMP NOT INCLUDED



MINILOT/G300

LAMP NOT INCLUDED



MIZAR/G250



IAFET/G300



Noemi

E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP55.


Dimensions

Height: 530 mm

Width: 350 mm

Depth: 305 mm

Weight: 3.2KG



Lampholder:

E27 / High Power E27

Junction to support; diameter 60mm area exposed to wind pressure: $CxS = m^2 0110$

Moulded Colours:

Black

Diffuser PMMA:

Clear




OFIR/NOEMI

LAMP NOT INCLUDED




OFIR/NOEMI

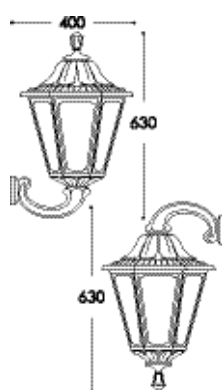

LOT/NOEMI



LOT/NOEMI

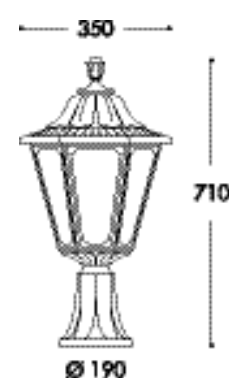


IAFET.R/NOEMI

IAFET.R/NOEMI





INCLUDED

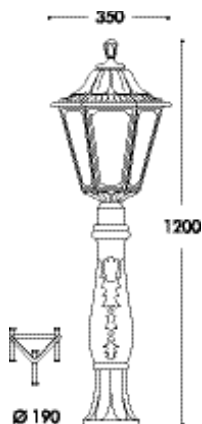

RICU/NOEMI

RICU/NOEMI



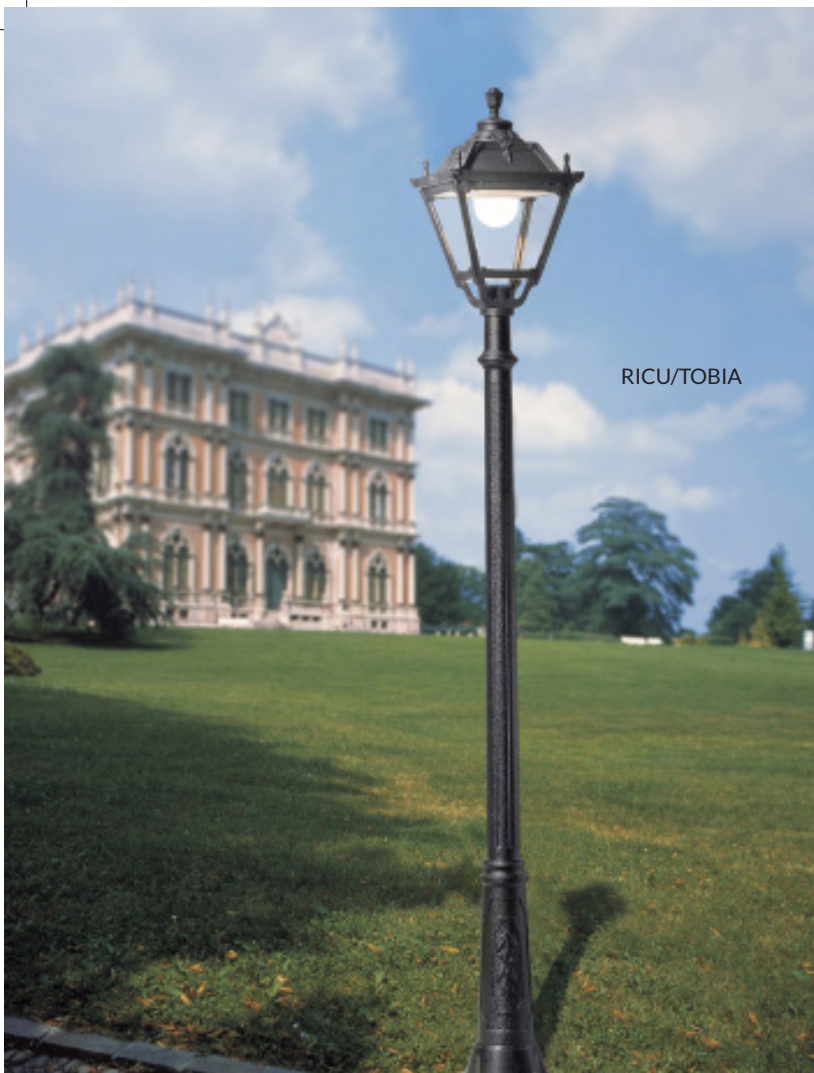


RICU/TOBIA

Tobia

E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP55.

Dimensions

Height: 520 mm
Width: 330 mm
Depth: 330 mm
Weight: 3.8KG



Lampholder:

E27 / High Power E27

Junction to support; diameter 60mm area exposed to wind pressure: $C_x S = m^2 0,089$

Moulded Colours:

Black

Diffuser PMMA:

Clear




OFIR/TOBIA

LAMP NOT INCLUDED



OFIR/TOBIA

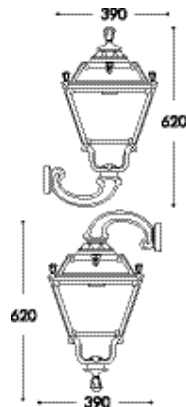


LOT/TOBIA



LOT/TOBIA



INCLUDED

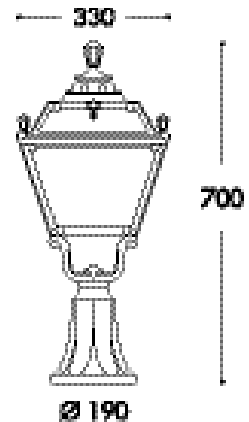


IAFET.R/TOBIA



IAFET.R/TOBIA



INCLUDED

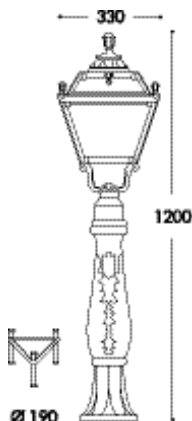


RICU/TOBIA



RICU/TOBIA



INCLUDED




Simon

E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP55.

Dimensions

Height: 560 mm
Width: 330 mm
Depth: 330 mm
Weight: 3.8KG

Lampholder:
E27 / High Power E27



Junction to support; diameter 60mm area exposed to wind pressure: $CxS = m^2 0,102$

Moulded Colours:
Black

Diffuser PMMA:
Clear




RICU/SIMON

OFIR/SIMON

LAMP NOT INCLUDED



OFIR/SIMON

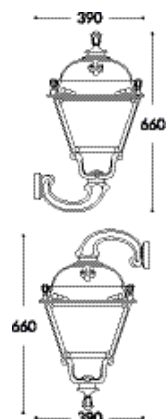


LOT/SIMON



LOT/SIMON

INCLUDED

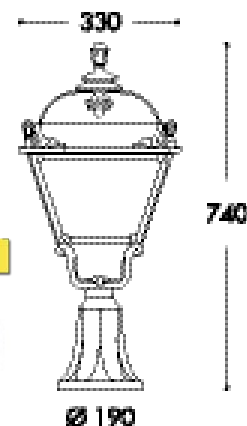


IAFET.R/SIMON



IAFET.R/SIMON

INCLUDED

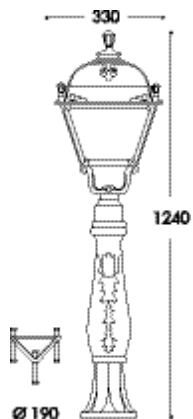


RICU/SIMON



RICU/SIMON

INCLUDED



NEBO/ELIA

Elia

E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP55.

Dimensions


Height: 740 mm

Width: 430 mm

Depth: 430 mm

Weight: 7.5KG

Lampholder:
E27



Junction to support; diameter 60mm area exposed to wind pressure: $CxS = m^2 0,165$

Moulded Colours:

Black

Diffuser PMMA:

Clear



LAMP NOT INCLUDED

Pietro

E27 square lantern in classic style, made of shock-proof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP55.

Dimensions and Height


Height: 770 mm

Width: 430 mm

Depth: 430 mm

Weight: 7.5KG

Lampholder:
E27



Junction to support; diameter 60mm area exposed to wind pressure: $CxS = m^2 0,182$

Moulded Colours:

Black

Diffuser PMMA:

Clear



LAMP NOT INCLUDED

ARON/PIETRO

Amelia

LED lamp range in modern style, made of shock-proof resin material, UV-rays stabilized, rust and corrosion-free. Round bollards in different sizes, spike and wall mounted versions available.


Provided with opal PMMA diffuser to get a uniform light distribution. Supplied with TÜV approved, long-life and efficient E27 LED filament lamps suitable for outdoor use included. Insulation class II, protection rating IP55

Dimensions

Height: 250/400/800 mm

Diameter: Ø 100 mm

Lampholder:
E27



Moulded Colours:
Black / Grey

Diffuser:
Opal



AMELIA ANGLED



AMELIA WALL



AMELIA SPIKE



AMELIA 250




AMELIA 400

AMELIA400BL



AMELIA 800

AMELIA800GY

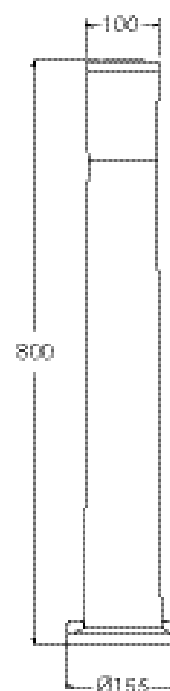

Carlo

LED lamp range in modern style, made of shock-proof resin material, UV-rays stabilized, rust and corrosion-free. Round bollards in different sizes, spike and wall mounted versions available.


Provided with double PMMA diffusers to gather the lighting output and get its uniform spread. Supplied as standard with TÜV approved, long-life and efficient GU10 LED lamp included. Insulation class II, protection rating IP55.

Dimensions
Height: 250/400/800 mm
Diameter: Ø 100 mm

Lampholder:
GU10 3.5W 4000K

Moulded Colours:
Black / Grey


Diffuser:
Opal & Clear




CARLOFSBL




CARLO ANGLED

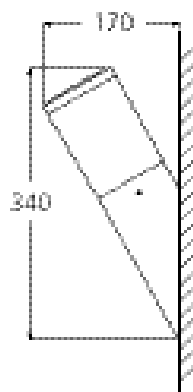


CARLO WALL

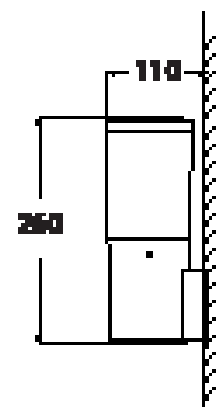


CARLO SPIKE

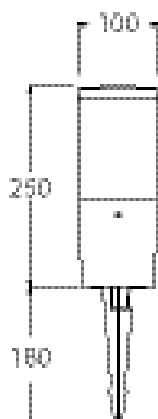


CARLO 250



CARLO 400

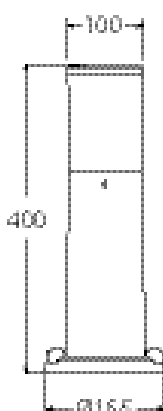

CARLO 800

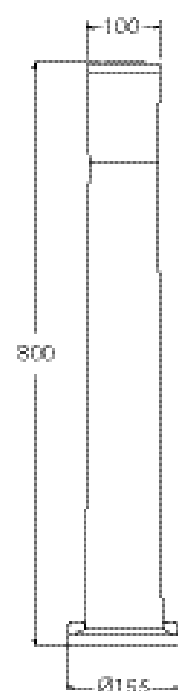




Ester

Architectural LED lamp range in modern style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Square bollards in different sizes, spike and wall mounted versions available. Supplied with white square reflector and with TÜV approved, long-life and efficient GX53 LED lamps included. Insulation class II, Protection rating IP55.

Dimensions
Height: 165/500/800 mm
Width: 126 mm
Depth: 126 mm
Weight: 4.3KG



Lampholder:
GX53 - 7W / 10W 4000K

Moulded Colours:
Black / Grey

Diffuser:
Clear



ESTER SPIKE 10W



ESTER 800 LED 10W



ESTER WALL 7W



ESTER 500 LED 10W



Elisa Bollard

Architectural LED lamp range in modern style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Square bollards in different sizes, spike and wall mounted versions available. Supplied with white square reflector and with TÜV approved, long-life and efficient GX53 LED lamps included.

Insulation class II, Protection rating IP55.


Dimensions

Height: 800 mm

Width: 126 mm

Depth: 126 mm

Weight: 4.3KG



INCLUDED

Lampholder:

GX53 - 10W 4000K

Moulded Colours:

Black / Grey

Diffuser:

Clear



ELISA800/LED10GY



MIRELLA

LAMP NOT INCLUDED

Mirella

Bollard range in classic style made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Provided with E27 lamp holder and prepared for louvre fixation. Insulation class II, protection rating IP55.


Dimensions

Height: 520 mm

Diameter: Ø 150 mm

Depth: 240 mm

Weight: 2.5KG



Lampholder:

E27

Moulded Colours:

Black

Louvre Colour::

White Resin





SAURO1100C

Sauro Bollard

Bollard range in classic style made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Provided with E27 lamp holder and prepared for louvre fixation. Insulation class II, protection rating IP55.


Dimensions

Height: 500 / 800 / 1100 mm

Diameter: Ø 150 mm

Diameter Base: Ø 245 mm

Weight: 2.7KG - 4KG



Lampholder:
E27

Moulded Colours:
Black


Louvre Colours:
White Resin / Chrome



SAURO 500

LAMP NOT
INCLUDED


SAURO500



SAURO 1100

LAMP NOT
INCLUDED


SAURO1100

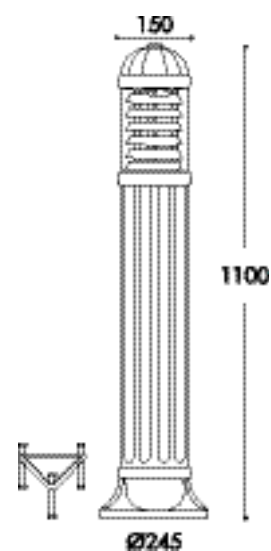

SAURO 800

LAMP NOT
INCLUDED

SAURO800C

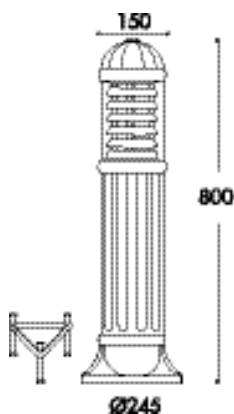

Sauro Bollard LED

Bollard range in classic style made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV approved, long-life and efficient GX53 LED lamp included available in different wattages. Uniform light distribution for a safer and more enjoyable night atmosphere. Insulation class II, protection rating IP55.

Dimensions


Height: 500 / 800 / 1100 mm
Diameter: Ø 150 mm
Diameter Base: Ø 245 mm
Weight: 3.2KG - 4.5KG

Lampholder:

GX53 10W 4000K

Moulded Colours:
Black

Louvre Colours:
White Resin



SAURO500/LED10



SAURO 500 LED

SAURO 1100 LED

SAURO500/LED10




SAURO1100/LED10



SAURO 800 LED

SAURO800/LED10

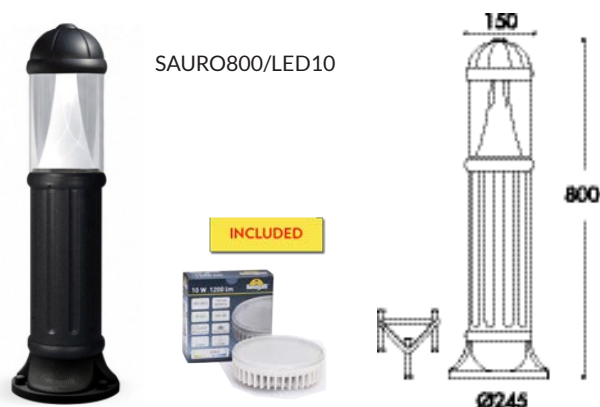

FRANCA902LBL

Franca 90

LED lamp range in modern style made of shock-proof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for indoor and outdoor installations on wall and ceilings or on spike.

Wall version available with single opening for one side light emission or with double opening for up & down light emission. Supplied as standard with TÜV approved, long-life and efficient with GU10 LED lamp included. Insulation class II, protection rating IP55.

Dimensions


Height: 115 mm

Diameter: Ø95 mm

Weight: 0.4KG

Lampholder:

GU10 3.5W 4000K



Moulded Colours:
Black / Grey

Diffuser:
Frosted




FRANCA 90

FRANCA90GY



INCLUDED




FRANCA 90 WALL

FRANCA90WALLBL



INCLUDED

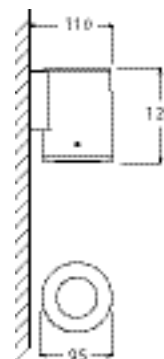


FRANCA SPIKE

FRANCA90SPIKEY



INCLUDED




FRANCA 90 UP & DOWN

FRANCA902LGY



INCLUDED

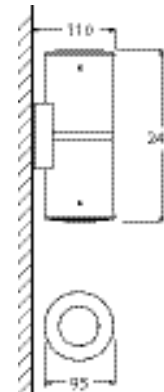

Marta 90

Up&down bulkhead lamp made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Available with single opening for one side light emission or with double opening for up&down light emission. Supplied as standard with TÜV approved, long-life and efficient GU10 LED lamps. Insulation class II, Protection rating IP55.

Dimensions

Height: 170 mm

Width: 92 mm

Depth: 80 mm

Weight: 0.5KG

Lampholder:



GU10 4.5W / 9W 4000K

Moulded Colours:

Black / Grey / White

Diffuser:

Frosted

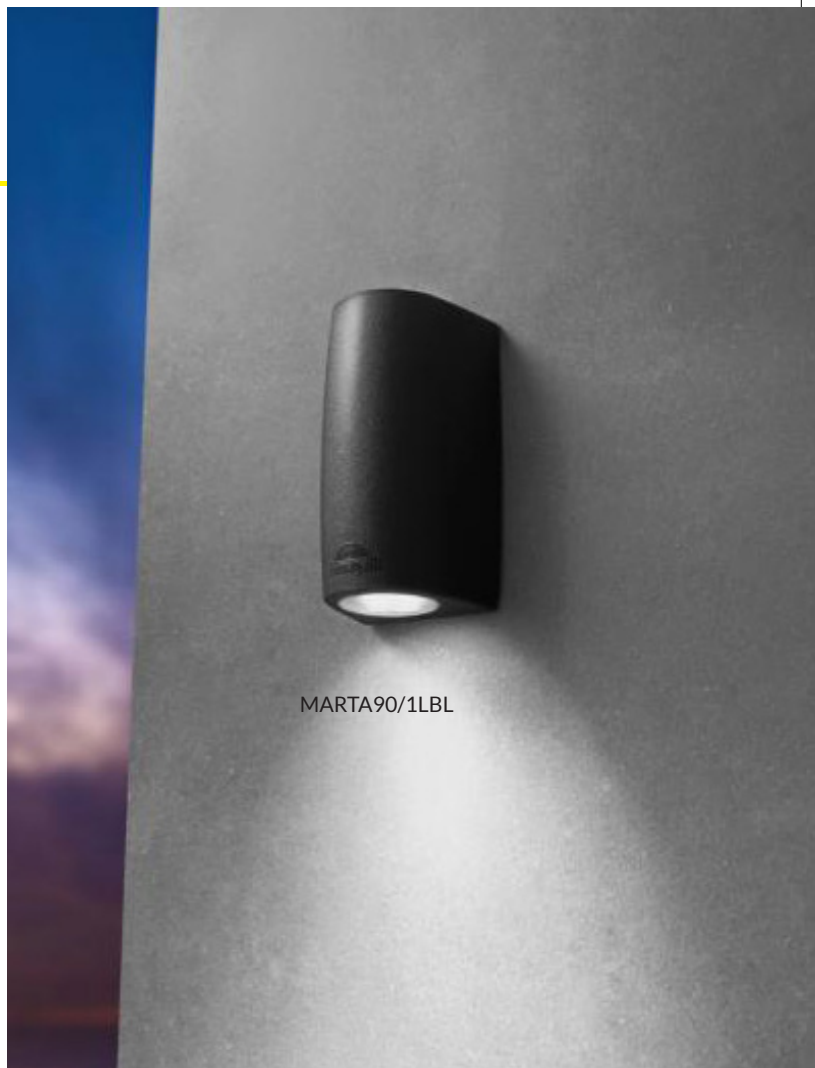

MARTA90/1LBL

MARTA 90 - 1 Light

MARTA90/1LGY



MARTA 90 - 2 Light

MARTA90/2LBL



MARTA 160 - 2 Light

MARTA160/2LBL



Dimensions

Height: 192 mm

Width: 164 mm

Depth: 145 mm

Weight: 1.1KG

Lampholder: GX53

10W x 2 4000K

Moulded Colours:

Black


Diffuser:

Frosted

Abram 150

Lamp with no visible screws and UP&DOWN light emission. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV approved, long-life and efficient R7s LED lamps 4W-400lm included. Insulation class II, Protection rating IP55.

Dimensions
Height: 120mm
Width: 155mm
Depth: 60mm
Weight: 0.3KG

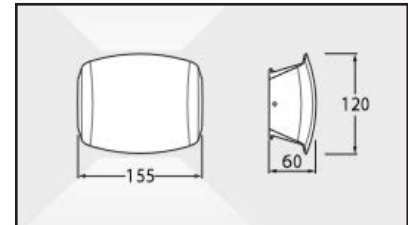

Lampholder: R7S
4W 4000K

Moulded Colours:
Black / Grey / White

Diffuser:
Transparent




ABRAM150GY

Abram 190

Lamp with no visible screws and UP&DOWN light emission. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV approved, long-life and efficient R7s LED lamps 8,5W-900lm included. Insulation class II, Protection rating IP55.

Dimensions
Height: 120mm
Width: 195mm
Depth: 60mm
Weight: 0.3KG



Lampholder: R7S
8.5W 4000K

Moulded Colours:
Black / Grey / White

Diffuser:
Transparent



ABRAM190BL

Livia 160

LED downlight lamp with no visible screws suitable for indoor and outdoor installations. Made of shock-proof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV approved, long-life and efficient GX53 LED lamps included. Insulation class II, protection rating IP 55.


Dimensions

Height: 100mm

Width: 160mm

Depth: 160mm

Weight: 0.3KG



Lampholder: GX53
7W 4000K

Moulded Colours:
Black / Grey / White

Diffuser:
Frosted

INCLUDED



LIVIA160GY

Lorenza 150

Surface wall lamp with square shape, made of shock-proof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV approved, long-life and efficient R7s LED lamps 4W-400lm included. Insulation class II, Protection rating IP55.


Dimensions

Height: 150mm

Width: 150mm

Depth: 45mm

Weight: 0.3KG



Lampholder: R7S
4W 4000K

Moulded Colours:
Black / Grey / White

Diffuser:
Transparent

INCLUDED



LORENZA150WH


FRANCYBL.



Francy

Bulkhead lamp with no visible screws and UP & DOWN light emission. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV approved, long-life and efficient LED filament lamps suitable for outdoor use included. Version with motion sensor available. Insulation class II, Protection rating IP66. Available also with open version cover.

Dimensions
Height: 300 mm
Width: 130 mm
Depth: 85 mm
Weight: 0.7KG



Lampholder:
E27

Moulded Colours:
Black / Grey

Diffuser:
Opal


INCLUDED



Francy OP PIR

Bulkhead lamp with no visible screws and front light emission. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. Provided with E27 lampholder. Complete with microwave daylight and motion sensor. Sensor operating on voltage 220-240V. Insulation class II, Protection rating IP66.

Dimensions
Height: 300 mm
Width: 130 mm
Depth: 85 mm
Weight: 0.7KG



Lampholder:
E27

Microwave daylight and motion sensor

Moulded Colours:
Black

Diffuser:
Opal

FRANCYBLOP/E27PIR




LAMP NOT INCLUDED



Francy OP

Bulkhead lamp with no visible screws and front light emission. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. Complete with TÜV approved, long-life and efficient GX53 LED lamps included or provided with E27 lampholder. Version with motion sensor available. Insulation class II, Protection rating IP66

Dimensions
Height: 300 mm
Width: 130 mm
Depth: 85 mm
Weight: 0.7KG



Lampholder:
E27 / GX53

Moulded Colours:
Black / Grey / White

Diffuser:
Opal




FRANCYGYOP/E27



FRANCY OP


FRANCYWHOP



FRANCY OP E27


LAMP NOT INCLUDED

FRANCYWHOP/E27



FRANCY OP


FRANCYBLOP



FRANCY OP E27

LAMP NOT INCLUDED

FRANCYBLOP/E27






Berta

Round bulkhead lamp with no visible screws, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. GX53 LED Insulation class II, Protection rating IP66.

Dimensions
Diameter: Ø275 mm
Depth: 80 mm
Weight: 1KG

Lampholder:
GX53 11W 4000K



Moulded Colours:
Black / White

Diffuser:
Opal



Umberta


Round bulkhead lamp with no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. GX53 LED Provided with motion sensor. Insulation class II, Protection rating IP66.

Dimensions
Diameter: Ø350 mm
Depth: 94 mm
Weight: 1.3KG

Lampholder:
GX53 11W 4000K

Moulded Colours:
Black / White

Diffuser:
Opal



Gelmi

Round bulkhead lamp with eyelid or grid cover. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. GX53 LED version available. Insulation class II, Protection rating IP66.

Dimensions


Diameter: Ø313 mm

Depth: 90 mm

Weight: 1KG

Lampholder

GX53 11W 4000K



Moulded Colours:
Black / White

Diffuser:
Opal


GELMI GRILL ONLY BLACK



GELMI EYELID



GELMIELWH

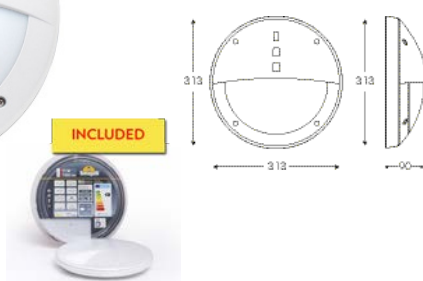

GELMI GRILL



GELMIGRBL



GELMI EYELID



GELMIELBL





Rita

Round bulkhead lamp in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. E27 version available. Insulation class II, Protection rating IP66.

Dimensions

Diameter: Ø355 mm

Depth: 90 mm


Weight: 1KG

Lampholder:

E27

Moulded Colours:

Black



Diffuser:

Opal



Lucia

Round bulkhead lamp with ring, eyelid or guard cover. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for ceiling, wall and post installation also with bracket angled at 35°. Supplied as option with coloured backlit base. GX53 LED or E27 version available. Insulation class II, Protection rating IP66.

Dimensions


Diameter: Ø300 mm

Depth: 90 mm

Weight: 1KG

Lampholder:

E27 / GX53 11W 4000K



Moulded Colours:

Black / Grey / White

Diffuser:

Opal




LUCIA

LUCIAWH




INCLUDED



LUCIA /E27

LAMP NOT INCLUDED

LUCIABL/E27




LUCIA EL

LUCIAELWH




INCLUDED



LUCIA EL /E27

LAMP NOT INCLUDED

LUCIAELBL/E27




LUCIA GD

LUCIAGDBL




INCLUDED



LUCIA GD /E27

LAMP NOT INCLUDED

LUCIAGDGY/E27






Maddi

Oval bulkhead lamp with ring, vertical eyelid or horizontal eyelid cover. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall, ceiling and post installation also with bracket angled at 35°. Supplied as option with coloured backlit base. GX53 LED or E27 version available. Insulation class II, Protection rating IP66.

Dimensions
 Height: 330 mm
 Width: 230 mm
 Depth: 90 mm
 Weight: 1KG

Lampholder:
 GX53 11W 4000K

Moulded Colours:
 Black / Grey



Diffuser:
 Opal



MADDI HL



MADDI HL / E27



MADDI - VE



MADDI - VE / E27



Minitommy

LED floodlight made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for indoor and outdoor installations on wall and ceilings, in the ground or on spikes. Ring cover versions available with no visible screws. Supplied as standard with TÜV approved, long-life and efficient GU10 LED lamp included. The floodlight is fully adjustable and it can tilt and turn at will. Insulation class II, Protection rating IP66.

Dimensions


Height: 127 mm

Width: 122 mm

Weight: 0.45KG

Lampholder:

GU10 3.5W 4000K



Moulded Colours:
Black / Grey

Diffuser:
Frosted



MINITOMMY

MINITOMMY.




MINITOMMY SPIKE

MINITOMMYSPIKE



MINITOMMY

MINITOMMYGY

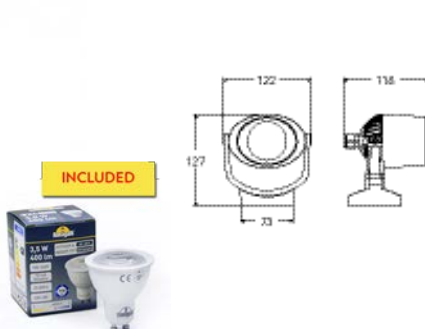

MINITOMMY SPIKE

MINITOMMYSPIKEGY





Tommy - EL

LED floodlight with single light made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for indoor and outdoor installations on wall and ceilings, in the ground or on spikes. Supplied as standard with TÜV approved, long-life and efficient GX53 LED lamp included. The floodlight is fully adjustable and it can tilt and turn at will. Insulation class II, Protection rating IP66.

Dimensions


Height: 165 mm

Width: 152 mm

Weight: 0.8KG

Lampholder:

GX53 10W 4000K



Moulded Colours:

Black

Diffuser:

Opal



TOMMY - EL



TOMMY EL SPIKE



Giova / Germana


Rectangular floodlight with no visible screws made in shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ground installation. Provided complete with a fully adjustable bracket to direct the light emission. Supplied with TÜV approved, long-life and efficient GX53 LED lamps included. Insulation class II, Protection rating IP66.

Dimensions and Height

Height: 280 mm

Width: 180 mm

Weight: 1.6KG



Lampholder:

GX53 20W 4000K (2 x 10W)

INCLUDED

Moulded Colours:

Black

Diffuser:

Opal



Giova / Giuseppe


Square floodlight with no visible screws made in shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ground installation. Provided complete with a fully adjustable bracket to direct the light emission. Supplied with TÜV approved, long-life and efficient GX53 LED lamps. Insulation class II, Protection rating IP66.

Dimensions and Height

Height: 300 mm

Width: 300 mm

Weight: 3KG



Lampholder:

GX53 40W 4000K (4 x 10W)

INCLUDED

Moulded Colours:

Black

Diffuser:

Opal






Ceci 90

DRIVE-OVER in-ground luminaires with no visible screws, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV approved, long-life and efficient GU10 LED lamp included. Insulation class II, Protection rating IP67.

Dimensions and Height
Installation Housing Depth: 127 mm
Diameter: Ø92 mm
Weight: 0.35KG

Lampholder: GU10
3.5W 4000K



Moulded Colours:
Black / Grey

Diffuser:
Frosted




Ceci 120

DRIVE-OVER in-ground luminaires with no visible screws, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV approved, long-life and efficient GX53 LED lamp included. Insulation class II, Protection rating IP67.

Dimensions and Height
Installation Housing Depth: 93 mm
Diameter: Ø120 mm
Weight: 0.45KG

Lampholder: GX53
3W 4000K



Moulded Colours:
Black / Grey

Diffuser:
Frosted



Ceci 120 3 Light

DRIVE-OVER in-ground luminaries with no visible screws, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

Supplied as standard with TÜV approved, long-life and efficient GX53 LED lamp included. Insulation class II, Protection rating IP67.

Dimensions and Height


Installation Housing Depth: 93 mm

Diameter: Ø120 mm

Weight: 0.45KG

Lampholder: GX53

3W 4000K



Moulded Colours:
Black / Grey

Diffuser:
Frosted

INCLUDED



Ceci 160

DRIVE-OVER in-ground luminaries with no visible screws, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.


Supplied as standard with TÜV approved, long-life and efficient GX53 LED lamp included. Insulation class II, Protection rating IP67.

Dimensions and Height

Installation Housing Depth: 111 mm

Diameter: Ø160 mm

Weight: 0.8KG

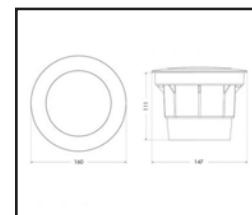

Lampholder: GX53

10W 4000K

Moulded Colours:
Black / Grey

Diffuser:
Frosted

INCLUDED






Aldo Round

Luminaries suitable both for in-ground, deck and wall recessed installation with no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round shape with different available covers for a diffuse or directed light emission. Supplied as standard with TUV approved, long-life and efficient G9 LED lamp included. Insulation class II, protection rating IP 67.

Dimensions
Height: 110mm
Width: 50mm
Depth: 50mm
Weight: 0.4KG

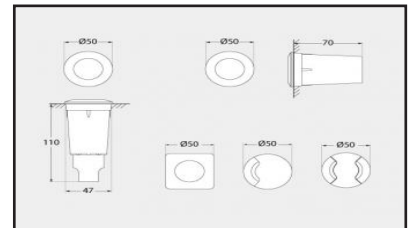

Lampholder: G9 LED
1.7W 4000K

INCLUDED



Moulded Colours:
Black / Grey


Diffuser:
Clear



Aldo 1 Light & 2 Light

Luminaries suitable both for in-ground, deck and wall recessed installation with no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round shape with different available covers for a diffuse or directed light emission. Supplied as standard with TUV approved, long-life and efficient G9 LED lamp included. Insulation class II, protection rating IP 67.

Dimensions
Height: 110mm
Width: 50mm
Depth: 50mm
Weight: 0.4KG

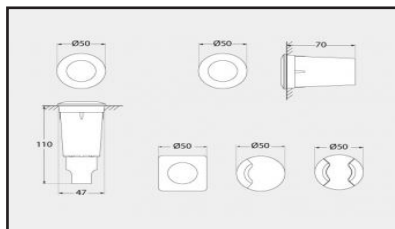

Lampholder: G9 LED
1.7W 4000K

INCLUDED



Moulded Colours:
Black / Grey


Diffuser:
Clear



Aldo Square

Luminaries suitable both for in-ground, deck and wall recessed installation with no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Square shape with different available covers for a diffuse or directed light emission. Supplied as standard with TUV approved, long-life and efficient G9 LED lamp included. Insulation class II, protection rating IP 67.

Dimensions
Height: 110mm
Width: 50mm
Depth: 50mm
Weight: 0.4KG

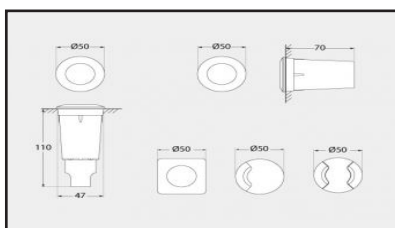


Lampholder: G9 LED
1.7W 4000K

INCLUDED

Moulded Colours:
Black / Grey

Diffuser:
Clear

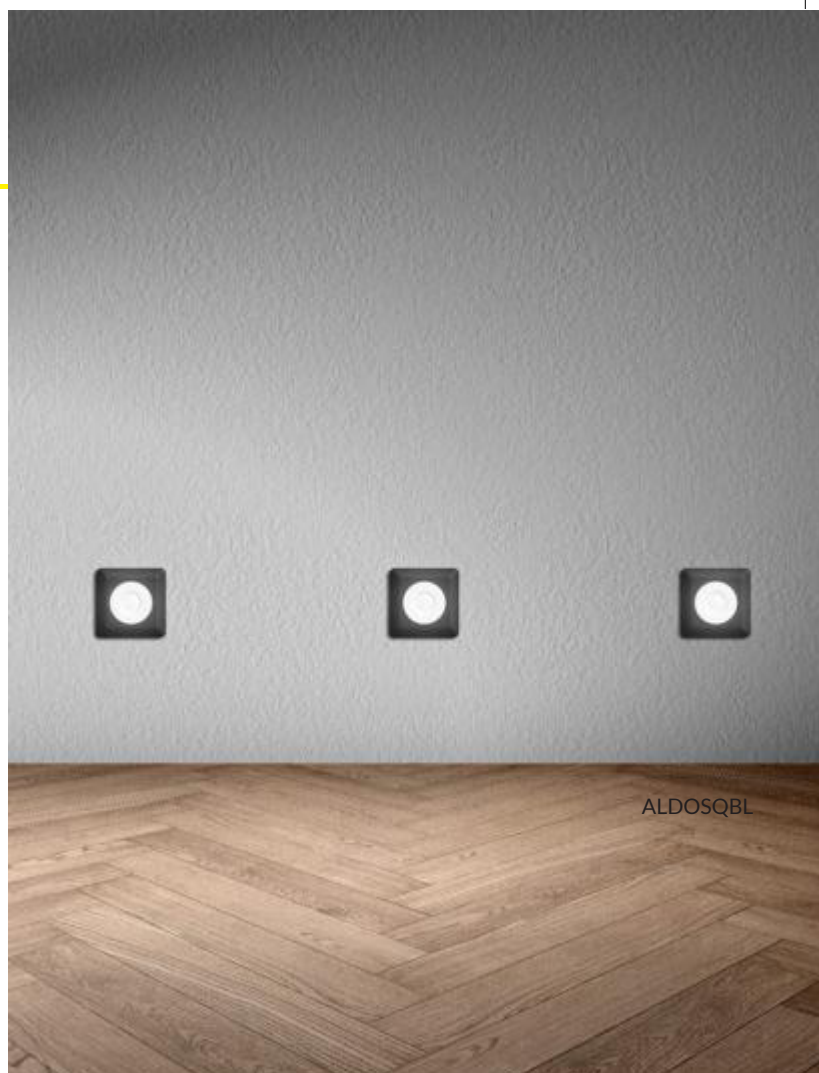


NINA190BL

Nina 190

Recessed wall lamp with rectangular shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV approved, long-life and efficient R7s LED lamps 8,5W-900lm included. Insulation class II, Protection rating IP55.

Dimensions
Height: 50mm
Width: 185mm
Depth: 50mm
Weight: 0.3KG

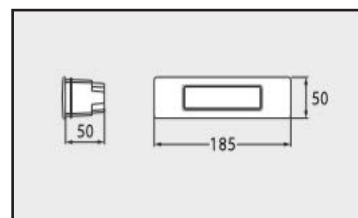

Lampholder: R7S
8.5W 4000K

INCLUDED

Moulded Colours:
Black / Grey / White

Diffuser:
Opal





LETI100RDGY

Leti 100 Round

Recessed wall lamp with round shape, made of shock-proof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV approved, long-life and efficient GX53 LED lamp 3W-350lm included. Available in 4 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.


Dimensions

Installation Housing Depth: 80 mm

Diameter: Ø134 mm

Weight: 0.4KG

Lampholder Included:
GX53 1 x 3W 4000K



Moulded Colours:
Black / Grey

Diffuser:
Opal



LETI 100 ROUND




LETI100RDBL



LETI 100 ROUND GRILL



LETI100RDGRBL

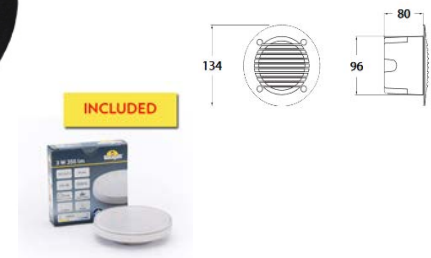

LETI 100 ROUND EYELID



LETI100RDELGY



LETI 100 ROUND EYELID GRILL



LETI100RDELGRBL



Leti 100 Square

Recessed wall lamp with square shape, made of shock-proof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV approved, long-life and efficient GX53 LED lamp 3W-350lm included. Available in 4 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Dimensions

Installation Housing Depth: 80 mm


Height: 115 mm

Width: 115 mm

Weight: 0.4KG

Lampholder Included:

GX53 1 x 3W 4000K



Moulded Colours:
Black / Grey

Diffuser:
Opal



LETI 100 SQUARE




LETI100SQGY



LETI 100 SQUARE GRILL



LETI100SQGRBL

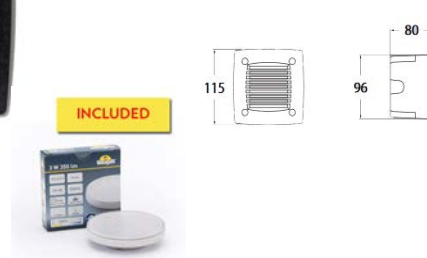

LETI 100 SQUARE EYELID




LETI100SQELBL



LETI 100 SQUARE EYELID GRILL



LETI100SQELGRBL

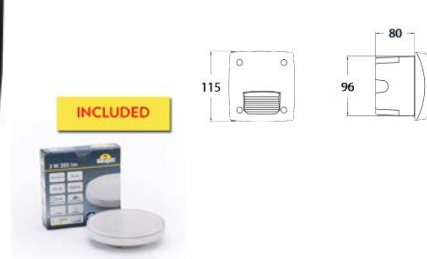

Leti 300

Recessed wall lamp with rectangular shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV approved, long-life and efficient GX53 LED lamps 2x 3W-700lm included. Insulation class II, Protection rating IP66.

Dimensions


Installation Housing Depth: 98 mm

Height: 113mm

Width: 293mm

Weight: 0.9KG

Lampholder: GX53
6W (2 x 3W) 4000K



Moulded Colours:
Black / Grey


Diffuser:
Opal



LETI300BL

LETI 300 GREY



LETI300GY



INCLUDED




LETI300GLBL




INCLUDED



LETI 300 GRILL GREY



LETI300GLGYELGY




INCLUDED



LETI 300 BLACK

LETI300BL



INCLUDED



Extra Leti 100 Round

Surface wall lamp with round shape, made of shock-proof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV approved, long-life and efficient GX53 LED lamp 3W-350lm included. Available in 3 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Dimensions

Diameter Ø40mm


Height: 140 mm

Width: 140 mm

Weight: 0.4KG

Lampholder: GX53

3W 4000K



Moulded Colours:
Black / Grey

Diffuser:
Opal




EXTRALETI100RDGY

EXTRALETI 100 ROUND



EXTRALETI100RDBL



EXTRALETI 100 ROUND GRILL




EXTRALETI100RDGRBL



EXTRALETI 100 ROUND EYELID



EXTRALETI100RDELGY






EXTRALETI100SQBL

Extra Leti 100 Square

Surface wall lamp with square shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV approved, long-life and efficient GX53 LED lamp 3W-350lm included. Available in 3 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Dimensions
Height: 120mm
Width: 120mm
Depth: 64/85
Weight: 0.5KG



Lampholder: GX53
3W 4000K

Moulded Colours:
Black / Grey


Diffuser:
Opal



EXTRALETI 100 SQUARE



EXTRALETI100SQGY




INCLUDED



EXTRALETI 100 SQUARE GRILL



EXTRALETI100SQGRBL




INCLUDED



EXTRALETI 100 SQUARE EYELID



EXTRALETI100SQELGY



INCLUDED



Extra Leti 200

Surface wall lamp with rectangular shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV approved, long-life and efficient GX53 LED lamp 3W-350lm included. Insulation class II, Protection rating IP66.


Dimensions

Height: 120mm

Width: 200mm

Depth: 65mm

Weight: 0.7KG



Lampholder: GX53
3W 4000K

Moulded Colours:
Black

Diffuser:
Opal

INCLUDED



EXTRALETI200BL

Extra Leti 300 HS

Surface wall lamp with rectangular shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV approved, long-life and efficient GX53 LED lamps 2x 3W-700lm included. Insulation class II, Protection rating IP66.


Dimensions

Height: 132mm

Width: 313mm

Depth: 113mm

Weight: 1KG



Lampholder: GX53
2 x 3W 4000K

Moulded Colours:
Black

Diffuser:
Opal

INCLUDED



EXTRALETI300HSBL



Linek

Lighting fixture body / Post base die-cast aluminium Alloy EN AB 46100 -

Arm / Post die-cast aluminium shaped section - Alloy EN AB 46100

Post extruded aluminium with round section Ø45mm Alloy EN-AW 6060

Diffuser polycarbonate UV stabilised GWT960°C

Fittings: A2 stainless steel exterior screw fixtures

Fixture flange with n.4 anchor bolts to be cast-in

Polyester powder paint finish resistant to corrosion and sea mist (ISO72523)

Installation: Wall, Post - Degree of protection: IP43 - Insulation class I - Can be installed on flammable surfaces - Conforms to the standard EN 60598 (CEI 34-21) and specific provisions

Lampholder:
E27

Moulded Colours:
Black


Diffuser:
Transparent



LINEK UPTURNED


LAMP NOT INCLUDED

182W0/1



LAMP NOT INCLUDED

182W1/1



LINEK PILLAR TOP

LAMP NOT INCLUDED


182F0/1



LINEK POST

LAMP NOT INCLUDED

182F2/1

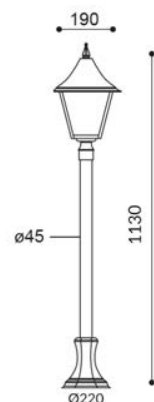

Ries

Lighting fixture body / Post base die-cast aluminium Alloy EN AB 46100

Arm / Post die-cast aluminium shaped section - Alloy EN AB 46100

Post extruded aluminium with round section Ø45mm Alloy EN-AW 6060

Diffuser polycarbonate UV stabilised GWT960°C

Fittings: A2 stainless steel exterior screw fixtures

Fixture flange with n.4 anchor bolts to be cast-in

Polyester powder paint finish resistant to corrosion and sea mist (ISO72523)

Installation: Wall, Post - Degree of protection: IP43

Insulation class I & II - Can be installed on flammable surfaces - Conforms to the standard EN 60598 (CEI 34-21) and specific provisions

Lampholder:

E27

Moulded Colours:

Black

Diffuser:

Transparent




RIES UPTURNED

LAMP NOT INCLUDED



163W0/1




RIES DOWNTURNED

LAMP NOT INCLUDED



163W1/1



RIES PILLAR TOP

LAMP NOT INCLUDED



163F0/1




RIES POST

LAMP NOT INCLUDED



163F2/1

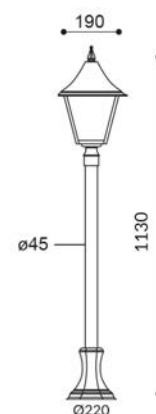



Burney

Lighting fixture body / Post base die-cast aluminium Alloy EN AB 46100

Arm / Post die-cast aluminium shaped section - Alloy EN AB 46100

Post extruded aluminium with round section Ø50mm Alloy EN-AW 6060

Diffuser polycarbonate UV stabilised GWT960°C

Fittings: A2 stainless steel exterior screw fixtures

Fixture flange with n.4 anchor bolts to be cast-in

Polyester powder paint finish resistant to corrosion and sea mist (ISO72523)

Installation: Wall, Post - Degree of protection: IP43

Insulation class I - Can be installed on flammable surfaces - Conforms to the standard EN 60598 (CEI 34-21) and specific provisions

Lampholder:
E27

Moulded Colours:
Black


Diffuser:
Transparent



BURNEY UPTURNED

LAMP NOT INCLUDED


183W0/1



BURNEY DOWNTURNED

LAMP NOT INCLUDED


183W1/1



BURNEY PILLAR TOP

LAMP NOT INCLUDED


183F0/1

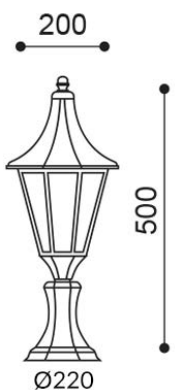

BURNEY POST

LAMP NOT INCLUDED

183F2/1

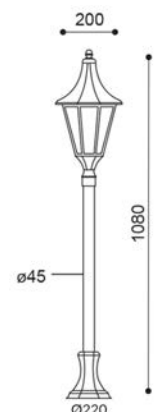

Duran

Lighting fixture body / Post base die-cast aluminium Alloy EN AB 46100

Arm / Post die-cast aluminium shaped section - Alloy EN AB 46100

Post extruded aluminium with round section Ø50mm Alloy EN-AW 6060

Diffuser polycarbonate UV stabilised GWT960°C

Fittings: A2 stainless steel exterior screw fixtures

Fixture flange with n.4 anchor bolts to be cast-in Polyester powder paint finish resistant to corrosion and sea mist (ISO72523)

Installation: Wall, Post - Degree of protection: IP43

Insulation class I and II - Can be installed on flammable surfaces - Conforms to the standard EN 60598 (CEI 34-21) and specific provisions

Lampholder:
E27

Moulded Colours:
Black

Diffuser:
Transparent




DURAN UPTURNED

LAMP NOT INCLUDED



160W0/1




DURAN DOWNTURNED

LAMP NOT INCLUDED



160W1/1



DURAN PILLAR TOP

LAMP NOT INCLUDED



160F0/1




DURAN POST

LAMP NOT INCLUDED



160F1/1

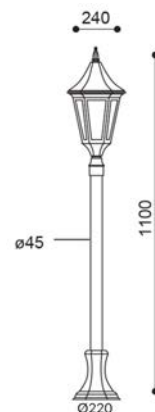

503W0/1



Empire & Araja

Lighting fixture body / Post base die-cast aluminium Alloy EN AB 46100

Curved arm aluminium with round section Ø32mm Alloy EN-AW 6060

Post extruded aluminium with round section Ø75/120mm Alloy ENAW 6060

Diffuser clear polycarbonate UV stabilised GWT960°C GWT850/960°C

Optics anodically oxidised aluminium

Fittings: A2 stainless steel exterior screw fixtures Fixture flange with n.4 anchor bolts to be cast-in

Polyester powder paint finish resistant to corrosion and sea mist

Electromagnetic ballast with overheating protection for discharge lamps with parallel rephasing $\cos \phi > 0.9$

Power cable Head/base type ND21N neoprene/silicon

Lampholder:

E27

Moulded Colours:

Black

Diffuser:


Transparent



EMPIRE WALL LIGHT

LAMP NOT INCLUDED

503W0/1



ARAJA WALL LIGHT

LAMP NOT INCLUDED

180W0/1




180W0/1




EMPIRE TELESCOPIC POST

LAMP NOT INCLUDED

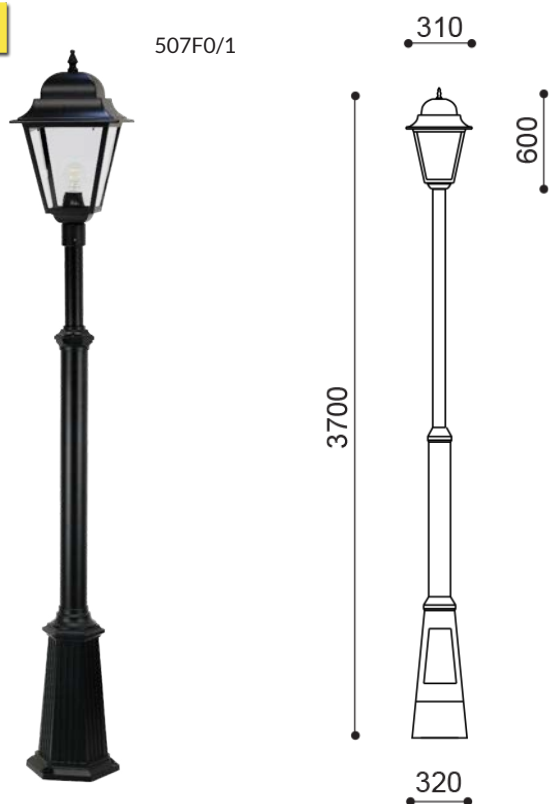

ARAJA TELESCOPIC POST

LAMP NOT INCLUDED

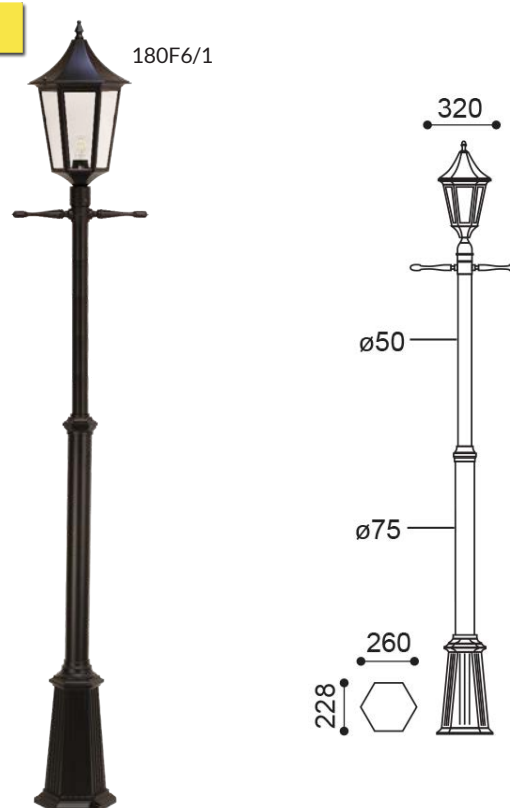



720W0/1

Boston

Lighting fixture body / Post base die-cast aluminium Alloy EN AB 46100

Arm / Post die-cast aluminium shaped section - Alloy EN AB 46100

Post extruded aluminium with round section Ø50mm Alloy EN-AW 6060

Diffuser polycarbonate UV stabilised GWT960°C cat. V2

Fittings: A2 stainless steel exterior screw fixtures

Fixture flange with n.4 anchor bolts to be cast-in

Polyester powder paint finish resistant to corrosion and sea mist (ISO72523)

Installation: Wall, Post - Degree of protection: IP43

Insulation class I and II - Can be installed on flammable surfaces - Conforms to the standard EN 60598 (CEI 34-21) and specific provisions

Lampholder:
E27

Moulded Colours:
Black

Diffuser:
Transparent




BOSTON UPTURNED

LAMP NOT INCLUDED




720W0/1



LAMP NOT INCLUDED



720W1/1




BOSTON PILLAR TOP

LAMP NOT INCLUDED



700F0/1




BOSTON POST

LAMP NOT INCLUDED



700F1/1



BOSTON POST

LAMP NOT INCLUDED

720F1/3



720F1/3



650F2/1

Soler

Lighting fixture body / Post base die-cast aluminium Alloy EN AB 46100

Arm / Post die-cast aluminium shaped section - Alloy EN AB 46100

Post extruded aluminium with round section Ø50mm Alloy EN-AW 6060

Copper cap (651 only)

Diffuser polycarbonate UV stabilised GWT960°C cat. V2

Fittings: A2 stainless steel exterior screw fixtures

Fixture flange with n.4 anchor bolts to be cast-in

Polyester powder paint finish resistant to corrosion and sea mist (ISO72523)

Installation: Wall, Post - Degree of protection: IP43

Insulation class I and II - Can be installed on flammable surfaces - Conforms to the standard EN 60598 (CEI 34-21) and specific provisions

Lampholder:
E27

Moulded Colours:
Black


Diffuser:
Transparent



SOLER UPTURNED

LAMP NOT INCLUDED


650W0/1



SOLER DOWNTURNED

LAMP NOT INCLUDED

650W1/1



SOLER PILLAR TOP

LAMP NOT INCLUDED


650F0/1



SOLER POST

LAMP NOT INCLUDED


650F2/1

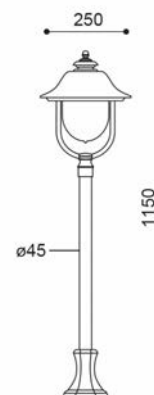

SOLER 3 LIGHT POST

LAMP NOT INCLUDED

650F3/3

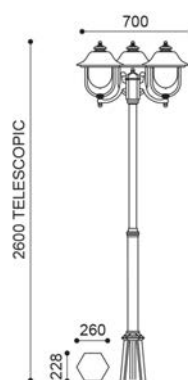

Gilbert

Lighting fixture body / Post base die-cast aluminium Alloy EN AB 46100

Arm / Post die-cast aluminium shaped section - Alloy EN AB 46100

Electrics and wiring enclosed in lighting fixture body


Installation: Wall - Degree of protection: IP43

Insulation class I - Can be installed on flammable surfaces - Conforms to the standard EN 60598 (CEI 34-21) and specific provisions

Lampholder:
E27

Moulded Colour:
Black

Diffuser:
Transparent



LAMP NOT INCLUDED



Meridian

Body: Die-cast aluminium alloy EN AB46100

Screen: Tempered borosilicate glass, 6 mm

Optics: Satin anodised aluminium 99 85

Seals: Closed-cell EPDM rubber

Screws: in steel AISI316

Paint: UV-stabilised polyester powder anti-corrosion coating

Use: Wall installation

Compliant with Standard EN60598-1 and particular requirements


Installable on Normally Flammable surfaces

All electrification refer to the maximum power, you can ask for lower powers

Lampholder:
E27

Moulded Colours:
Black

Diffuser:
Transparent



LAMP NOT INCLUDED





365W0/1

Minus

Lighting fixture body / Post base die-cast aluminium Alloy EN AB 46100

Arm / Post die-cast aluminium shaped section - Alloy EN AB 46100

Post extruded aluminium with round section Ø125mm Alloy EN-AW 6060

Diffuser polycarbonate UV stabilised GWT960°C cat. V2

Fittings: A2 stainless steel exterior screw fixtures

Fixture flange with n.4 anchor bolts to be cast-in Polyester powder paint finish resistant to corrosion and sea mist (ISO72523)

Installation: Wall, Post - Degree of protection: IP43

Insulation class I and II - Can be installed on flammable surfaces - Conforms to the standard EN 60598 (CEI 34-21) and specific provisions

Lampholder:
E27

Moulded Colours:
Black

Diffuser:
Transparent




MINUS WALL LIGHT

LAMP NOT INCLUDED



265W0/1




MINUS BOLLARD

LAMP NOT INCLUDED



265F1/1

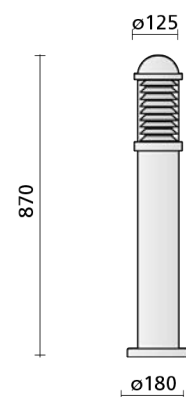


MINUS WALL LIGHT FLAT

LAMP NOT INCLUDED



365W0/1




MINUS BOLLARD FLAT

LAMP NOT INCLUDED



365F1/1

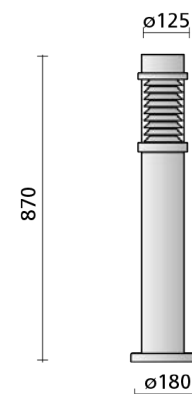



Somis & Brixi

Body: Die-cast aluminium alloy EN AB46100
 Optics: Satin anodised aluminium 99 85
 Seals: Closed-cell EPDM rubber
 Screws: in steel AISI316
 Paint: UV-stabilised polyester powder anti-corrosion coating
 Use: Wall installation (Flush)
 Compliant with Standard EN60598-1
 Installable on Normally Flammable surfaces
 All electrification refer to the maximum power, you can ask for lower powers

Lampholder:
E27

Moulded Colour:
Black

Diffuser:
Transparent



Sirius


Sirius is an ideal product for outdoor applications. Impact and scratch resistant, it has excellent class II electrical insulation properties. Extremely strong but very light and practical, Sirius resists corrosion and guarantees long life in any environmental condition. The article directs the light in both directions, upwards and downwards. The diffusers, made of clear polycarbonate ensuring optional an uniform light diffusion in your outdoor spaces.

Insulation class II, Protection rating IP44. Fixing: Wall.
 Components: Moulded polycarbonate Wiring: 220-240V Manufactured in compliance with EN60598

Lampholder:
E27 (x2)

Moulded Colour: Black

Diffuser: Transparent

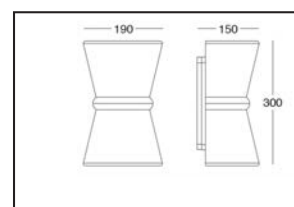

Marte

Made of high-quality Nylon materials, Marte is an ideal product for outdoor applications. The series is available in black and can be adapted to suit every need by providing the right atmosphere. Extremely strong but very light and practical, Marte resists corrosion and guarantees long life in any environmental condition. The four-face diffuser made of clear polycarbonate ensures optimal and uniform light diffusion in your outdoor spaces. Insulation class II, Protection rating IP44. Fixing: Wall, Ceiling, Ground Components: Nylon 30% Glass Filled Wiring: 220-240V Manufactured in compliance with EN60598

Lampholder:
E27

Moulded Colours:
Black


Diffuser:
Transparent



MARTE WALL LIGHT

LAMP NOT INCLUDED


MARTE001

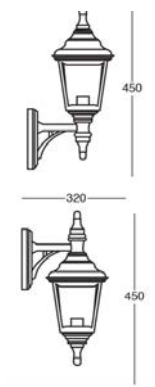

MARTE HALF LANTERN

LAMP NOT INCLUDED


MARTE010



MARTE PILLAR TOP

LAMP NOT INCLUDED


MARTE002



MARTE POST

LAMP NOT INCLUDED

MARTE004



Urano

Made of high-quality Nylon materials, Urano is an ideal product for outdoor applications.

The series is available in black and can be adapted to suit every need by providing the right atmosphere. Extremely strong but very light and practical, Urano resists corrosion and guarantees long life in any environmental condition. The six-face diffuser made of clear polycarbonate ensures optimal and uniform light diffusion in your outdoor spaces.

Insulation class II, Protection rating IP44. Fixing: Wall, Ceiling, Ground Components: Nylon 30% Glass Filled Wiring: 220-240V Manufactured in compliance with EN60598

Lampholder:
E27

Moulded Colours:
Black


Diffuser:
Transparent



URANO WALL LIGHT

LAMP NOT INCLUDED


URANO001



URANO HALF LANTERN

LAMP NOT INCLUDED

URANO004



URANO PILLAR TOP

LAMP NOT INCLUDED


URANO002



URANO POST

LAMP NOT INCLUDED

URANO005





D.577/P/DP190/3/F6

D.577 Medium


Lanterns and posts in resin material Duralighting®: a patterned material studied to resist against UV-Rays, corrosion and all weather agents.

It can be used in any climatic areas especially in marine environments and tropical climates. Diffuser in polycarbonate UV stabilized. Fixing kit included. Suitable for outdoor use: garden.

Lampholder:
E27

Moulded Colours
Black


Diffuser:
Transparent

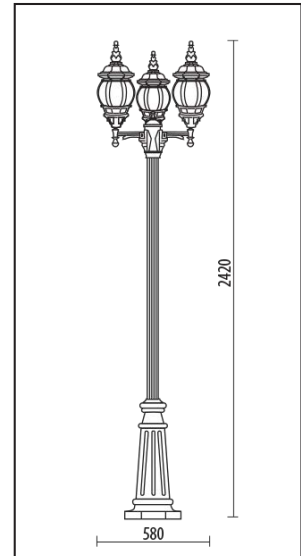

UPTURNED WALL LIGHT

LAMP NOT
INCLUDED


D.577/P/STL



DOWNTURNED WALL LIGHT

LAMP NOT
INCLUDED


D.577/P/SPL



PILLAR TOP

LAMP NOT
INCLUDED


D.577/P/LE



TALL POST

LAMP NOT
INCLUDED

D.577/P/PLEN



D.577 Large


Lanterns and posts in resin material Duralighting®: a patterned material studied to resist against UV-Rays, corrosion and all weather agents.

It can be used in any climatic areas especially in marine environments and tropical climates. Diffuser in polycarbonate UV stabilized. Fixing kit included. Suitable for outdoor use: garden.

Lampholder:
E27

Moulded Colours
Black


Diffuser:
Transparent

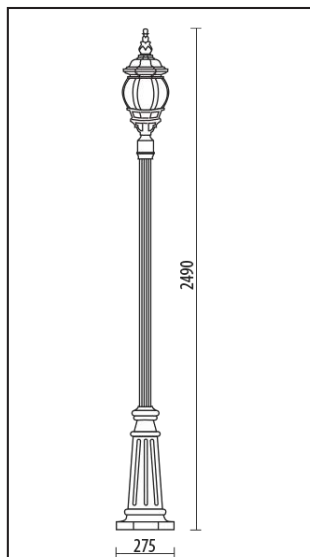

UPTURNED WALL LIGHT

LAMP NOT
INCLUDED


D.577/M/STBA



DOWNTURNED WALL LIGHT

LAMP NOT
INCLUDED


D.577/M/SPL



PILLAR TOP

LAMP NOT
INCLUDED

D.577/M/LE

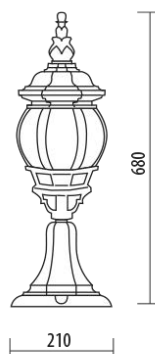

TALL POST













LAMP NOT
INCLUDED

D.577/M/PLEN4007















Components Heads

All the connection hubs of Fumagalli poles and lanterns have a diameter of 60mm; this unique feature allows many different possible combinations of complete lamps with the same components, for a big stock flexibility.

	Small Head		Medium Head	Large Head		Extra Large		
	ANNA	SABA	RUT	NOEMI				
HEXAGONAL LANTERNS								
			GOLIA	CEFA	TOBIA	SIMON	ELIA	PIETRO
SQUARE LANTERNS								
	IESSE				DARIA			
HALF LANTERNS								
	GLOBE 250		GLOBE 300		BISSO/SYSGLOBE BL		MINILOT/G.	
GLOBES								
















Components Posts

Each post is supplied with the suitable cage or screws for fixation.

MIKROLOT	MINILOT	LOT	IAFET.R
			
MIZAR	ALOE'R	ARTU'	GIGI
			
RICU	NEBO	KARMEL 3000 / 3500	ALUMINIUM LOUVRE
			

Components

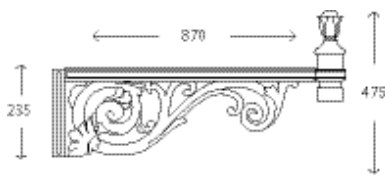All the connection hubs of Fumagalli poles and lanterns have a diameter of 60mm; this unique feature allows many different possible combinations of complete lamps with the same components, for a big stock flexibility.

2 LIGHT SPACER 	BISSO/SYSBL 	3 LIGHT SPACER 
2 LIGHT SPACER 	OFIR/SYSBL 	3 LIGHT SPACER 
2 LIGHT SPACER 	ADAM. 	3 LIGHT SPACER 
ARON WALL BRACKET 	ARON 	ARON BACK PLATE 
BISSO WALL BRACKET 	OFIR WALL BRACKET 	SICHEM HANGING CHAIN 

Lamps

Innovative TÜV certified LED lamps with standard E27, GX53 or GU10 Lamp holder to get a very energy efficient LED lighting system. Heatsink and driver are built-in lamps. Available in different wattage versions and colour temperature.



	E27 LED FILAMENT A60		E27 LED FILAMENT A70
	H.LED.FIL.3K	H2.LED.FIL.3K	H3.LED.FIL.3K
POWER	6W	8W	12W
LUMINOUS FLUX	800 lm	1000 lm	1500 lm
EFFICIENCY	133 Lm/W	125 Lm/W	125 Lm/W
VOLTAGE	100-240 V	100-240 V	100-240 V
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz
CURRENT	60 mA	76 mA	100 mA
POWER FACTOR	> 0.7	> 0.7	> 0.7
COLOUR RENDERING INDEX RA	> 80	> 80	> 80
BEAM ANGLE	360°	360°	360°
WARM UP TIME	≤0,5"	≤0,5"	≤0,5"
SWITCHING CYCLE	<100.000	<100.000	<100.000
LIFETIME	25.000 h	25.000 h	25.000 h
KELVIN	2700 K	2700 K	2700 K
COMPARISON	6W = 60W incandescent	8W = 75W incandescent	12W = 100W incandescent




	GX53 Ø 75mm	
	H.LED.G53	H.LED.G53.3K
POWER	3W	3W
LUMINOUS FLUX	350 lm	350 lm
EFFICIENCY	116 Lm/W	116 Lm/W
VOLTAGE	100-240 V	100-240 V
FREQUENCY	50/60 Hz	50/60 Hz
CURRENT	30 mA	30 mA
COLOUR RENDERING INDEX RA	> 80	> 80
BEAM ANGLE	120°	120°
WARM UP TIME	≤0,5"	≤0,5"
SWITCHING CYCLE	<30.000	<30.000
LIFETIME	25.000 h	25.000 h
KELVIN	4000 K	3000 K
COMPARISON	3W = 40W incandescent	3W = 40W incandescent



	GU10	H.LED.GU10.3K	H.LED.GU10.4K
POWER	3.5W	3.5W	3.5W
LUMINOUS FLUX	400 lm	400 lm	400 lm
EFFICIENCY	114 Lm/W	144 Lm/W	144 Lm/W
VOLTAGE	100-240 V	100-240 V	100-240 V
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz
CURRENT	70 mA	70 mA	70 mA
COLOUR RENDERING INDEX RA	> 80	> 80	> 80
BEAM ANGLE	36°	36°	36°
WARM UP TIME	≤0,5"	≤0,5"	≤0,5"
SWITCHING CYCLE	<25.000	<25.000	<25.000
LIFETIME	25.000 h	25.000 h	25.000 h
KELVIN	3000 K	4000 K	4000 K
COMPARISON	3.5W = 50W incandescent	3.5W = 50W incandescent	3.5W = 50W incandescent


	G9 LED	H.LED.G09.4K
POWER	1.7W	1.7W
LUMINOUS FLUX	170 lm	170 lm
EFFICIENCY	100 Lm/W	100 Lm/W
VOLTAGE	100-240 V	100-240 V
FREQUENCY	50/60 Hz	50/60 Hz
CURRENT	17 mA	17 mA
COLOUR RENDERING INDEX RA	80	80
BEAM ANGLE	110°	110°
WARM UP TIME	≤0,5"	≤0,5"
SWITCHING CYCLE	>40.000	>40.000
LIFETIME	15.000 h	15.000 h
KELVIN	4000 K	4000 K
COMPARISON	1.7W = 20W incandescent	1.7W = 20W incandescent

E27 HIGH POWER LED		
	H2.LED.HIP.3K	H2.LED.HIP.4K
POWER	30W	30W
LUMINOUS FLUX	3300 lm	3300 lm
EFFICIENCY	110 Lm/W	110 Lm/W
VOLTAGE	100-240 V	100-240 V
FREQUENCY	50/60 Hz	50/60 Hz
CURRENT	135 mA	135 mA
POWER FACTOR	>0.9	>0.9
COLOUR RENDERING INDEX RA	> 80	> 80
BEAM ANGLE	200°	200°
WARM UP TIME	≤1"	≤1"
SWITCHING CYCLE	<30.000	<30.000
LIFETIME	25.000 h	25.000 h
KELVIN	3000 K	4000 K
COMPARISON	30W = 50W HQJ-SON	30W = 50W HQJ-SON

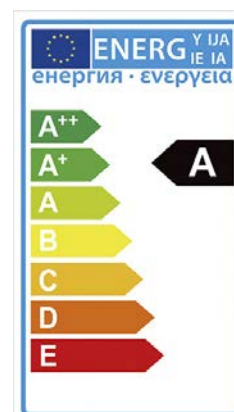

GX53 100MM				
	H2.LED.G53.4K	H2.LED.G53.3K	H3.LED.G53.3K	H3.LED.G53
POWER	7W	7W	10W	10W
LUMINOUS FLUX	800 lm	800 lm	1200 lm	1200 lm
EFFICIENCY	114 Lm/W	114 Lm/W	120 Lm/W	120 Lm/W
VOLTAGE	100-240 V	100-240 V	100-240 V	100-240 V
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
CURRENT	34 mA	34 mA	48 mA	48 mA
POWER FACTOR	> 0.9	> 0.9	> 0.9	> 0.9
COLOUR RENDERING INDEX RA	> 80	> 80	> 80	> 80
BEAM ANGLE	120°	120°	120°	120°
WARM UP TIME	≤0,5"	≤0,5"	≤0,5"	≤0,5"
SWITCHING CYCLE	<30.000	<30.000	<30.000	<30.000
LIFETIME	25.000 h	25.000 h	25.000 h	25.000 h
KELVIN	4000 K	3000 K	3000 K	4000 K
COMPARISON	7W = 70W incandescent	7W = 70W incandescent	10W = 100W incandescent	10W = 100W incandescent


GX53 180MM	
	H4.LED.G53
POWER	11W
LUMINOUS FLUX	1300 lm
EFFICIENCY	118 Lm/W
VOLTAGE	100-240 V
FREQUENCY	50/60 Hz
CURRENT	150 mA
POWER FACTOR	>0.9
COLOUR RENDERING INDEX RA	> 80
BEAM ANGLE	90°
WARM UP TIME	≤0.5"
SWITCHING CYCLE	<25.000
LIFETIME	25.000 h
KELVIN	4000 K
COMPARISON	11W = 100W incandescent

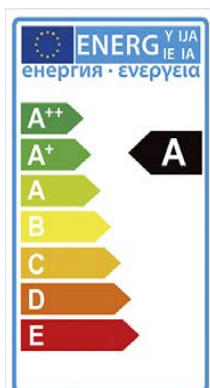



R7S LED		
	H7.LED.R7S.4K	H8.LED.R7S.4K
POWER	4W	8.5W
LUMINOUS FLUX	400 lm	900 lm
EFFICIENCY	100 Lm/W	106 Lm/W
VOLTAGE	100-240 V	100-240 V
FREQUENCY	50/60 Hz	50/60 Hz
CURRENT	75 mA	168 mA
POWER FACTOR	>0.5	>0.5
COLOUR RENDERING INDEX RA	> 80	> 80
BEAM ANGLE	360°	360°
WARM UP TIME	≤0.5"	≤0.5"
SWITCHING CYCLE	45.000	<45.000
LIFETIME	25.000 h	25.000 h
KELVIN	4000 K	4000 K
COMPARISON	4W = 40W incandescent	8.5W = 60W incandescent





Symbol Key


 IP43 Protected from tools and small wires greater than 1mm. Protected from water spray less than 60 degrees from vertical.


 IP44 Protected from tools and small wires greater than 1mm. Protected from water spray from any direction.


 IP54 Protected from limited dust ingress. Protected from water spray from any direction.


 IP55 Protected from limited dust ingress. Protected from low pressure water jets from any direction.


 IP66 Protected from total dust ingress. Protected from high pressure water jets from any direction.


 IP67 Protected from total dust ingress. Protected from immersion between 15cm and 1 meter in depth.


 This product meets EU safety, health and environmental protection requirements.

 Class II (double insulated electrical appliance). Connection to electrical earth not required.


 UV Rays stabilized material


 Realized with unbreakable materials


 Recyclable materials (lamps and wirings excluded)


 Operative temperature between -60 °C / +90 °C

 Motion sensor


 Drive over 5000Kg

 TUV Approved. Production monitored and safety tested

 Suitable for mounting on normal inflammable surfaces.

 5 Degrees of protection against external mechanical impacts CEI EN 50102

 Glow wire test
960

 Class I These appliances must have their chassis connected to electrical earth by an earth conductor.

Index

160F0/1	51	BISSO/G300	12	GELMIGRBL	31	MARTA90/2LGY	25
160F1/1	51	BISSO/G300CL	12	GIGI.	65	MARTA90/2LWH	25
160W0/1	51	BISSO/GOLIA	10	GIGI/BISSO/ANNA3L	5	MARTE001	60
160W1/1	51	BISSO/RUT	7	GIOVA/GERMANA	37	MARTE002	60
161W0/1	59	BISSO/RUTWH	7	GIOVA/GIUSEPPE	37	MARTE004	60
163F0/1	49	BISSO/SABA	6	GIOVA/GIUSEPPEWH	37	MARTE010	60
163F2/1	49	BISSO/SYSBL	66	H.FC1	65	MIKROLOT.	65
163W0/1	49	BISSO/SYSGLOBEBL	64	H.LED.FIL.3K	67	MIKROLOT/ANNA	4
163W1/1	49	CARLO250BL	19	H.LED.G09.4K	67	MIKROLOT/ANNAWH	4
180F6/1	53	CARLO250GY	19	H.LED.G53	67	MIKROLOT/G250	12
180W0/1	52	CARLO400BL	19	H.LED.G53.3K	67	MIKROLOT/G250CL	12
182F0/1	48	CARLO400GY	19	H.LED.GU10.3K	67	MIKROLOT/SABA	6
182F2/1	48	CARLO800BL	19	H2.LED.FIL.3K	67	MINILOT.	65
182W0/1	48	CARLO800GY	19	H2.LED.G53.4K	68	MINILOT/CEFA	8
182W1/1	48	CARLOFSBL	18	H2.LED.HIP.3K	68	MINILOT/G.	64
183F0/1	50	CARLOFSGY	19	H3.LED.FIL.3K	67	MINILOT/G300CL	12
183F2/1	50	CARLOSPIKEBL	19	H3.LED.G53	68	MINILOT/GOLIA	10
183W0/1	50	CARLOSPIKEGY	19	H3.LED.G53.3K	68	MINILOT/RUT	7
183W1/1	50	CARLOWALLBL	19	H4.LED.G53	68	MINILOT/RUTWH	12
185W0/1	57	CARLOWALLGY	19	H7.LED.R7S.4K	68	MINITOMMY.	35
265F1/1	58	CECI1203LBL	39	H8.LED.R7S.4K	68	MINITOMMYGY	35
265W0/1	58	CECI120BL	38	IAFET.R	65	MINITOMMYSPIKE	35
365F1/1	58	CECI120GY	38	IAFET.R/G300	12	MINITOMMYSPIKEGY	35
365W0/1	58	CECI160BL	39	IAFET.R/G300CL	12	MIRELLA	21
4500W/1	57	CECI160GY	39	IAFET.R/NOEMI	13	MIZAR.	65
503W0/1	52	CECI90BL	38	IAFET.R/SIMON	15	MIZAR/ANNA	4
507F0/1	53	CECI90GY	38	IAFET.R/TOBIA	14	MIZAR/ANNAWH	4
650F0/1	56	CEFA	64	IESSE	5	MIZAR/CEFA	8
650F2/1	55,56	D.577/M/DP190/1	63	IESSEWH	5	MIZAR/G250	12
650F3/3	56	D.577/M/LE	63	KARMEL3500BL	65	MIZAR/G250CL	12
650W0/1	56	D.577/M/PLEN4007	63	LETI100RDBL	42	MIZAR/G300	12
650W1/1	56	D.577/M/SPL	63	LETI100RDELBL	42	MIZAR/G300CL	12
700F0/1	54	D.577/M/STBA	63	LETI100RDELGRBL	42	MIZAR/GOLIA	10
700F1/1	54	D.577/P/DP190/3/F6	62	LETI100RDELGY	42	MIZAR/SABA	6
720F1/3	55	D.577/P/LE	62	LETI100RDGRBL	42	NEBO/ELIA	16
720W0/1	54	D.577/P/PLEN	62	LETI100RDGRGY	42	NINA190BL	41
720W1/1	54	D.577/P/SPL	62	LETI100SQBL	43	NINA190GY	41
800W0/1	59	D.577/P/STL	62	LETI100SQELBL	43	NINA190WH	41
ABRAM150BL	26	DARIA	5	LETI100SQELGRBL	43	OFIR.	66
ABRAM 150GY	26	ELIA	16	LETI100SQELGY	43	OFIR/NOEMI	13
ABRAM150WH	26	ELISA800/LED10BL	21	LETI100SQGRBL	43	OFIR/SIMON	15
ABRAM190BL	26	ELISA800/LED10GY	21	LETI100SQGY	43	OFIR/SYSBL	66
ABRAM190GY	26	ESTER500/LED7GY	20	LETI100SQGRBL	43	OFIR/TOBIA	14
ABRAM190WH	26	ESTER800/LED10BL	20	LETI100SQGRGY	43	PIETRO	16
ALDO1LBL	40	ESTERSPIKE/LED10BL	20	LETI300BL	44	RICU.	65
ALDO1LGY	40	ESTERSPIKE/LED10GY	20	LETI300GLBL	44	RICU/BISSO/CEFA3L	9
ALDO2LBL	40	ESTERWALL/LED7BL	20	LETI300GLGY	44	RICU/BISSO/GOLIA3L	11
ALDO2LGY	40	ESTERWALL/LED7GY	20	LETI300GY	44	RICU/BISSO/RUT3L	7
ALDORDBL	40	EXTRALETI100RDBL	45	LIVIA160BL	27	RICU/NOEMI	13
ALDORDGY	40	EXTRALETI100RDELBL	45	LIVIA160GY	27	RICU/SIMON	15
ALDOSQBL	41	EXTRALETI100RDELGY	45	LIVIA160WH	27	RICU/TOBIA	14
ALDOSQGY	41	EXTRALETI100RDGRBL	45	LORENZA150BL	27	RITABL	32
ALOE.R	65	EXTRALETI100RDGRGY	45	LORENZA150GY	27	RUT.	64
AMELIA250BL	17	EXTRALETI100RDGY	45	LORENZA150WH	27	SABA	64
AMELIA250GY	17	EXTRALETI100SQBL	46	LOT.	65	SAURO1100	22
AMELIA400BL	18	EXTRALETI100SQELBL	46	LOT/NOEMI	13	SAURO1100/LED10	23
AMELIA400GY	18	EXTRALETI100SQELGY	46	LOT/SIMON	15	SAURO1100C	22
AMELIA800BL	18	EXTRALETI100SQGRBL	46	LOT/TOBIA	14	SAURO500	22
AMELIA800GY	18	EXTRALETI200BL	47	LUCIABL	32	SAURO500/LED10	23
AMELIAFSBL	17	EXTRALETI300HSBL	47	LUCIABL/E27	33	SAURO500/LED10GY	23
AMELIAFSGY	17	FRANCA902LGY	24	LUCIAELBL	32	SAURO500C	22
AMELIASPIKEBL	17	FRANCA90BL	24	LUCIAELBL/E27	33	SAURO800	22
AMELIASPIKEGY	17	FRANCA90GY	24	LUCIAELGY/E27	32	SAURO800/LED10	23
AMELIAWALLBL	17	FRANCA90SPIKEGY	24	LUCIAELWH	33	SAURO800C	22
AMELIAWALLGY	17	FRANCA90WALLBL	24	LUCIAELWH/E27	32	SICHEM	66
ANNA.	64	FRANCA90WALLGY	24	LUCIAGDBL	33	SICHEM/ANNA	4
ARON.	66	FRANCYBL.	28	LUCIAGDBL/E27	32	SICHEM/ANNAWH	4
ARON/BASE	66	FRANCYBLOP	29	LUCIAGDGY/E27	33	SICHEM/CEFA	8
ARON/PIETRO	16	FRANCYBLOP/E27	29	LUCIAGY/E27	32	SIMON	15
ARTU.	65	FRANCYBLOP/E27PIR	28	LUCIAWH	33	SIRIUS001	59
ARTU'/CEFA	9	FRANCYGY	28	MADDIBL/E27	34	SPACER2LBL	66
ARTU'/GOLIA	10	FRANCYGYOP/E27	29	MADDIHLBL	34	SPACER3LBL	66
ARTU'/RUT	7	FRANCYWHOP	29	MADDIHLBL/E27	34	TOBIA.	14
BERTABL	30	FRANCYWHOP/E27	29	MADDIHLGY/E27	34	TOMMYEL	36
BERTAWH	30	G250CLEAR	11	MADDIVEBL.	34	TOMMYELSPIKE	36
BISSO.	66	G250OPAL	11	MADDIVEBL/E27	34	UMBERTABL	30
BISSO/ANNA	4	G300CLEAR	11	MADDIVEGY/E27	34	UMBERTAWH	30
BISSO/ANNAWH	4	G300OPAL	11	MARTA160/2LBL	25	URANO001	61
BISSO/CEFA	8	GELMIELBL	31	MARTA90/1LBL	25	URANO002	61
BISSO/G250	12	GELMIELBL/E27	31	MARTA90/1LGY	25	URANO004	61
BISSO/G250CL	12	GELMIELWH	31	MARTA90/2LBL	25	URANO005	61



MAGNALUX
LUXURY LIGHTING

Magnalux Ltd

14 Greenbank Industrial Estate
Newry, County Down
N.Ireland BT35 2QX
Tel: (+44) 028 308 33158
sales@magnalux.co.uk
www.magnalux.co.uk

